

# AMETRIX™



## **Shaper Shroud**

### LARGE

- Extruded aluminum housing
- · Die-cast aluminum end caps
- Integrated visor option -solid, perf or opal window
- Die-formed 94% reflective dual-finish anodized aluminum reflector
- Gasketed hinging doorframe indoor toolless entry, outdoor fasteners required
- PointGrab<sup>™</sup> adjustment

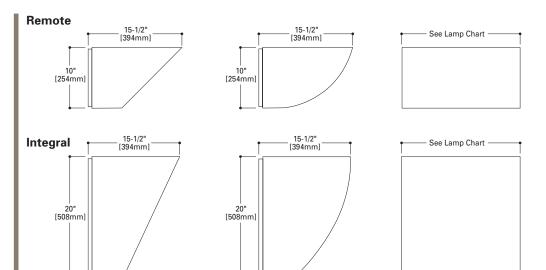

#### LAMP CHART

SOURCE	WATTAGE	LENGTH	
Tungsten	350/500	26"	
	900/1000	34"	
Metal Halide	175	20"	
	((2) 150)/250/400	26"	
	(2) 400	34"	

### Remote

SSR01







#### LAMP CHART

SOURCE	WATTAGE	LENGTH
Fluorescent	32/42/57	20"
	(2) 32/42	26"
	40/50/55	34"
	(2) 40/50/55	34"

## Integral

SSI01



**SSI01** 



### ORDERING INFORMATION

SAMPLE NUMBER: SN-LI-P-1-T350-120-W-SSR02

Product	Size - Indoor/Outdoor	Lens	No. of Lamps	Lamp/Ballast Type	Wattage
SN c-Scroll No Visor	LI Large Indoor Log Large Outdoor	□ C Clear □ P Micro-prismatic □ N None**	1 1 Lamp 2 2 Lamps†	Fluorescent (Electronic)  T Tungsten Halogen  E Metal Halide* (Electronic)  M Metal Halide (Magnetic)	□ 032 32W (F) † □ 040 40W (F) † □ 042 42W (F) † □ 050 50W (F) † □ 055 55W (F) † □ 057 57W (F) □ 150 □ 150W (E) († only)
Voltage □ 120 □ 120∨(T) □ 277 □ 277∨ □ 347 □ 347∨	Finish  W White  S Silver  B Bronze  C Custom (Consult factory)  Brass, Copper, Aluminum (Consult factory)	Mounting Remote  SSR01 Shroud Style 01  SSR02 Shroud Style 02	Integral*  SSI01 Shroud Style 01  SSI02 Shroud Style 02	Modification  MOD Provide description of the modification. (Consult factory)  * Not available with all sources or options. (Consult factory)	175W (M) 250 250W (M, R) 350 300W (T) 400 250W (M, R) † 500 500W (T) 900W (T) 1000W (T)
			Specifications and dimensions subject to change without notice.	** Only fluorescent (Long Twin Tube) † 2 lamp option	